

VIDEO/AUDIO SELECTOR



(MSV21A)



(MSV41A)

USER MANUAL MSV21A / MSV41A

V1.0

Package Contents -

- 1 MSV21A or MSV41A Selector
- 1 user manual
- 2 screws
- 4 foot pads
- 1 remote control cable

Any thing missed, please contact with your vendor.

Features

Video:

- Resolution up to 1920x1440.
- Pixel frequency up to 250MHz.
- Supports the DDC1, DDC2, DDC2B, DDC2B+, DDC2AB. (For video out port 1)
- Hot pluggable.
- Auto skips over the power-off and suspended PC and the unplugged VGA cable.

Audio:

- Operation Frequency: 50Hz~15KHz.
- Input Impedance: 20KΩ.
- Max. Audio Input: 2.5Vp-p.
- Input Connector: 3.5φmini-stereo jack.

Specification

Function	MSV21A	MSV41A	
Video Input Connector (HD-15 Female)	2	4	
Video Output Connector (HD-15 Female)	1		
Audio Input Connector (3.5φ Mini-Stereo Jack)	2	4	
Audio Output Connector (3.5φ Mini-Stereo Jack)	1		
LEDs	On Line	2	4
CTRL Connector	MD-6 (Female)		
VGA Resolution	1920 x 1440		
Housing	Metal		
Weight	310g	460g	
Dimensions (LxWxH) mm	150*84*25	230*84*25	

Hardware Requirements


	Requirement specifications
Monitor (Projector)	One highest resolution VGA, SVGA, Multisync, PLASMA monitor or projector.
PC	One VGA, SVGA or Multisync card.
Cable	Standard cable.

Front View



1. CTRL
Connected "Remote Control Cable" and switch Input port.
2. Video Output Connector
3. Audio Output Connector
4. Port LEDs
Green LEDs light up while the PC has successfully been selected.
5. Power Supply(SPARE)

Rear View

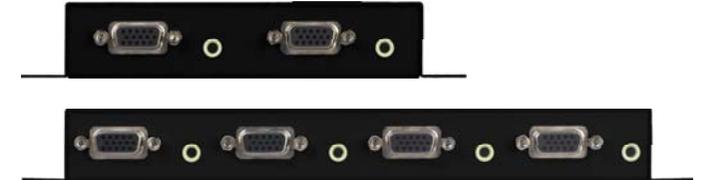

1. Video Input Connector
2. Audio Input Connector

Remote Control Cable



1. Port LEDs
Red LEDs light up while the PC has successfully been selected.
2. Port Selection Switches (Manual type)
Press the switch to access the chose PC.

Installation

1. Turn off the PC and monitor.
2. Connect the HD-15 video cable between the “video output” of PC and “video in” port of the video/audio Selector.
3. Connect the 3.5 ϕ audio cable between the audio output device and the “audio in” port of video/audio Selector.
4. Connect the HD-15 video cables between the “video input” of monitors and “video out” ports of video/audio Selector.
5. Plug the 3.5 ϕ earphones into the “audio out” ports of the video/audio Selector.
6. Turn on the PC, monitors and the related devices.

Note:

Available monitors include the VGA, SVGA, XGA, QXGA, UXGA, Multisync, and exclude the CGA, EGA, Mono.

Trademarks:

All the companies, brand names, and product names referred to this manual are the trademarks or registered trademarks belonging to their respective companies.