

# HDMI TO 3-RCA COMPOSITE

## VIDEO WITH STEREO AUDIO CONVERTER

(SKU: HRCA-AS-R | REV2) MANUAL V2

### Applications Guide:

This device converts digital HDMI into separate analog composite video & audio. It does not work with component video. If you need to convert composite video & stereo audio into HDMI, please use QVS P/N: HRCA-AS.

Package include video converter & Mini-USB power cable. This installation requires HDMI & 3-RCA composite video / stereo audio cables (not included).

- Turn OFF all devices.
- Connect the converter HDMI port to HDMI digital device
- Connect the converter power port using included Mini-USB power cable to any USB power port including USB wall outlet or Bluray player's USB port.
- Connect the converter RCA port to legacy TV or projector
- Turn ON all devices.



If you have any question or need any help with this cable, please go to <http://www.shopqvs.com/support>

You can also call us at (702) 228-3670 Monday to Friday, from 9:00am - 5:00pm PST or email us at [support@qvs.com](mailto:support@qvs.com).

Limited One Year Warranty. All images are for reference only. All names, trademarks & logos are property of their respective owners.

# HDMI TO 3-RCA COMPOSITE

## VIDEO WITH STEREO AUDIO CONVERTER

(SKU: HRCA-AS-R | REV2) MANUAL V2

### Specification:

Input: HDMI v1.3 Female Port

Output: 3-RCA Female Ports | Video (Yellow) & Audio (Red & White)

TV Standard: NTSC (default) & PAL Toggle Switch

Power: 5v1A Mini-USB Port

HDMI Supported Input Resolutions:

640x480 @60Hz, 800x600 @60Hz

1024x768 @60Hz, 1280x720 @60Hz

1280x1024 @60Hz, 1360x768 @60Hz

1600x1200 @60Hz, 1920x1080 @60Hz

480i/60Hz, 480p/60Hz, 576i/60Hz, 576p/60Hz

720p50/60Hz, 1080I50/60Hz, 1080p50/60Hz

CVBS Supported Output Formats:


NTSC\_M, NTSC\_J, PAL

DIM (mm): 66 (D) x 55 (W) x 20 (H)

WGT: 50g



Front Panel: Top Panel: Back Panel:

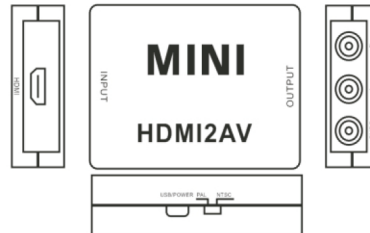

VISIT US ON THE WEB @  
[WWW.QVS.COM](http://WWW.QVS.COM)